



**Request for Qualifications
for
PROGRAM MANAGER
OPERATION & MAINTENANCE OF
TWO STORMWATER CAPTURE FACILITIES**

**CITY OF LAKEWOOD
PUBLIC WORKS**

February 3, 2025

TABLE OF CONTENTS

1. SECTION ONE – ADMINISTRATIVE INFORMATION	
A. Institution Contacts	1
B. Attachments	1
C. Due Date	1
D. Schedule of RFQ Events.....	1
2. SECTION TWO – INTRODUCTION	
A. Introduction.....	2
B. Facilities.....	2
3. SECTION THREE – SERVICES & SCOPE OF WORK	3
4. SECTION FOUR – QUALIFICATIONS & EXPERIENCE	4
5. SECTION FIVE – SUBMISSION REQUIREMENTS	
A. Content.....	5
B. Instructions.....	5
6. SECTION SIX – EVALUATION CRITERIA	6
7. SECTION SEVEN – CONTRACT	6

SECTION 1 - ADMINISTRATIVE INFORMATION

A. Institution Contacts

For RFQ related questions, please contact:

Name: Sam Chambers
Title: Project Manager
Phone: (562)866-9771, ext. 2505
Email: Schambers@lakewoodcity.org

B. Attachments

Attachment A: Sample Professional Services Agreement
Attachment B: GWMA Request for Qualifications

C. Due Date

Proposals must be submitted by 02/10/25 at Noon.
See "Instructions" in the Submission Requirements section of this document for details.

D. Schedule of RFQ Events

Request for Proposal Issued	02/03/2025
Proposals Due	02/10/2025
Possible Interviews with Short-List (30-minute)	Week of 02/10/2025
City Council Approval	02/25/2022

SECTION 2 - INTRODUCTION

A. Introduction

The purpose of this RFQ is to obtain Statements of Qualifications (SOQ), Hourly Fee Schedule and Proposed Annual Budget from qualified firms interested in working as a Consultant for the City of Lakewood, Public Works Department to provide comprehensive program management services for the Operation, Maintenance, and improvements of the City's two Stormwater Capture Facilities.

The selected program manager will be responsible for developing, executing and overseeing the operation and maintenance (O&M) program for the two stormwater capture facilities, ensuring regulatory compliance, identifying necessary improvements, assisting with hiring consultants and awarding of contracts, and managing the funding process. The consultant will evaluate the facilities and prepare recommendations for operational modifications to reduce future operational costs as well as modifications to align with Los Angeles County Water Quality Plan goals, including those identified by the Water Reliability Task Force and the City's MS4 permit compliance.

The selected individual or firm must have a strong understanding of the current regulatory environment and regional water quality issues, and must have relevant experience working with key agencies such as the Metropolitan Water District of Southern California, LA County Sanitation District, Council of Governments (COG), the Gateway Water Management Authority (GWMA), the Regional Water Quality Control Board, the LA County Flood Control District, LA County Department of Public Works and LA County Department of Public Health.

This solicitation does not commit the City of Lakewood to pay any cost incurred in the preparation of a response. In addition, the SOQ should be limited to 5 single-sided pages not including attachments. The City of Lakewood reserves the right to withdraw this solicitation at any time for any reason. The successful Consultant shall file insurance coverage and provide indemnification provisions and hold harmless clauses in favor of the City as described in the Professional Services Agreement in Attachment "A".

B. Facilities

Bolivar Park Stormwater Capture Facility

Located at: 3300 Del Amo Blvd Lakewood, CA 90712

The Bolivar Park Regional Stormwater Project is located in the Bolivar municipal park in the City of Lakewood. Underlying a significant portion of this park is a 7.5 ac-ft subsurface storage and infiltration system. Wet and dry weather flows are diverted from a nearby LACFCD 48" Reinforced Concrete Pipe (RCP) channel. This regional project's major components include:

- Rubber diversion dam (base raised 3")
- Grated drop inlet and diversion valve
- Nutrient Box pretreatment unit
- Pump Station with 4 pumps
- 8.9 ac-ft subsurface storage and infiltration gallery
- Wet well with 3 pumps
- Water harvesting unit (WAHASO) with connection to the Park's irrigation system
- Overflow discharge pump back to the Flood Control System
- Water harvesting system
- Discharges to Flood Control System.

Mayfair Park

Located at 5720 Clark Ave Lakewood, CA 90712

The Mayfair Park Regional Stormwater Project is located in the Mayfair municipal park in the City of Lakewood. Similar to Bolivar, underlying a significant portion of the park is a 13.8 ac-ft underground stormwater capture and infiltration facility. The regional project receives both wet and dry weather flows from a diversion structure, located in a nearby covered LACFCD Reinforced Concrete (RC) Channel (23'W x 11"-6'H). The regional project's major components include:

- 23'W x 3'H Rubber Diversion dam
- Grated drop inlet and Diversion valve
- Pretreatment unit
- 13.8 ac-ft subsurface storage unit
- Outlet valve and a wet well with 3 pumps
- Water harvesting unit (WAHASO) with connection to the Park's irrigation system
- Kraken discharge treatment unit
- Back-up Sanitary discharge line (The city has obtained a discharge permit from the Sanitation Districts)
- Treatment unit building with RC Controls

SECTION 3 – SCOPE OF SERVICES

The program manager will be responsible for the following:

Program Management and Oversight

- Develop and manage a comprehensive O&M program for the two stormwater capture facilities. Ensure that the facilities are properly maintained and operated by all relevant standards, regulations, and protocols. The selected individual or firm shall be responsible for program management for maintenance of the equipment, including but not limited to: sensors, monitors, pumps, valves, removing sediment and trash from structures, control systems, water harvesting systems, and other equipment as necessary as well as adherence to Los Angeles County Flood Control District (LACFCD), Sanitation Districts of Los Angeles County, LA County Department of Public Works and LA County Department of Public Health.

Consultant and Contractor Oversight:

- Identify the need for external consultants and contractors for improvements, prepare and issue RFPs, oversee the selection process, and manage contracts as necessary for facility upgrades. It is intended that the Program Manager will interview and select from the GWMA list of qualified engineering/contracting firms shortlisted in Attachment B or alternatively solicit and procure the services necessary to operate and maintain the two stormwater capture projects for the City.

Regulatory Compliance:

- Ensure compliance with all applicable regulations, including MS4 permits, stormwater diversion, infiltration regulations, and any other environmental requirements.
- Coordinate with regulatory agencies and relevant entities.

Funding Management:

- Develop and manage the allocation of available funds from GWMA and Regional Safe, Clean Water grant funds for short-term and long-term O&M efforts. Provide recommendations on the optimal use of funds for maintenance, capital improvements, and regulatory compliance.

Multi-Jurisdictional Coordination:

- Engage with the City of Lakewood, local governments, and other regional stakeholders to ensure that the O&M program is coordinated effectively. Facilitate communication and collaboration between jurisdictions and relevant agencies.

Facility Improvement Recommendations:

- Identify opportunities for improvements to the facilities to increase their operational effectiveness, enhance regulatory compliance, or reduce operational costs, and provide actionable recommendations to the City of Lakewood.

The Consultant is expected to establish and maintain a close working relationship with the City of Lakewood's staff throughout the work. The Consultant shall provide a Program Manager (single point of contact) to coordinate with the City of Lakewood. The Consultant's Program Manager shall be accessible during normal working hours. If at any time the level of performance falls below expectations, the City may release the Consultant or a Consultant's employee and request another person be assigned as needed and shall be approved by the City prior to commencing any duties. The Consultant's Program Manager shall be responsible for all matters related to the Consultant's personnel and operations, including but not limited to:

1. Assigning lead and supporting personnel to projects on an as-needed basis;
2. Administering personnel actions;
3. Submitting resumes containing the qualifications and experience of Consultant's personnel if required;
4. Responding to a variety of administrative requests from the City, i.e., billing questions, insurance renewals, etc.

SECTION 4 – QUALIFICATIONS & EXPERIENCE

To be considered for this role, firms must demonstrate the following qualifications and experience:

Experience in Managing Water Systems:

Proven experience in managing water capture systems, stormwater infrastructure, or other related water and/or wastewater management projects.

Regulatory Expertise:

Strong knowledge of relevant federal, state, and local regulations regarding water quality and environmental protection, including MS4 permits, stormwater diversion, and infiltration.

Familiarity with Regional Water Agencies:

A history of working with or understanding of regional water agencies, including the Metropolitan Water District of Southern California, Sanitation Districts, Flood Control District, Public Health Department, the Gateway Water Management Authority (GWMA), and other relevant stakeholders.

Program and Financial Management:

Experience managing program budgets, including allocating resources for short-term and long-term O&M and capital improvements.

Multi-Jurisdictional Coordination:

Ability to work across multiple jurisdictions and with various stakeholders, including local and regional governments, regulatory agencies, and other entities.

Technical Expertise:

Understanding of water capture facilities, their design, operations, maintenance requirements, and improvement strategies.

SECTION 5 - SUBMISSION REQUIREMENTS

A. Content

1. **Executive Summary:** Provide a concise overview of the firm's qualifications and understanding of the project scope.
2. **About your firm:** Provide firm name, address, contact, and number of years providing similar support services. Provide a description of the firm's history, structure, and relevant experience in managing similar projects, particularly water capture or stormwater management systems. Include any prior work with water-related facilities, regulatory agencies, and water management authorities.
3. **Project team:** Include a resume of the proposed Program Manager including relevant experience in water management, program management, regulatory compliance, and working with regional water agencies. Should the firm propose a team, provide information on the key project team members, their qualifications, and relevant experience in water management, program management, regulatory compliance, and working with regional water agencies.
4. **Project related experience:** Provide three detailed examples of projects ongoing or recently completed that included similar scope of services, and include details of the scope, outcomes, and any relevant lessons learned. List minimum of three professional references from similar projects demonstrating the firm's ability to manage complex programs and deliver successful outcomes, and provide phone numbers of owner's representatives.
5. **Project Approach:** Provide a detailed description of how the firm intends to manage the O&M program, including methodologies, strategies, and timelines for the program's development, execution, and oversight, as well as operational suggestions for improvements.
6. **Fee Schedule and Annual Budget:** In a separated, sealed envelope, provide a schedule of hourly rates, including overtime rates for applicable personnel classifications as well as reimbursable expenses. Provide an estimate of the annual proposed cost for the program management services. Fee schedule and budget will not be counted as part of the 5 page limit.

B. Instructions

The solicitation responses are to be prepared in the prescribed format and submitted electronically, via e-mail in PDF format, no later than 12:00 p.m. on February 10, 2025 to Sam Chambers.

The City reserves the right to reject any or all submitted SOQs, and no guarantee is made that any contract will be awarded pursuant to this Request for Qualifications. All costs incurred in the preparation of the SOQ and/or in the submission of additional information prior to the award of a written contract will be borne by the respondent. All SOQs submitted to the City of Lakewood shall become the property of the City.

Please submit one (1) electronic copy by 02/10/2025 at 12:00 PM to:

Sam Chambers
Project Manager
Schambers@lakewoodcity.org

Telephone or facsimile proposals will not be considered. Proposals received after the date of closing will not be considered. All questions relative to this RFQ must be submitted in writing or electronically to the individual listed in Section 1. A. no later than the date specified in Section 1.C.

Proposals must remain valid for a period of 90 days from the submission due date. The City of Lakewood reserves the right to reject any or all proposals or negotiate separately with any proposer. The City of Lakewood is committed to an inclusive procurement process and does not discriminate based on race, gender, ethnicity, or other protected classes.

SECTION 6 - EVALUATION CRITERIA

The City of Lakewood will use the following criteria in evaluating submissions received in response to this RFQ. The evaluation of qualifications and the selection of the successful proposer will be based on the information provided by the Consultant in its submission, including, without limitation, responses to the Consultant's qualifications. Consideration may also be given to any additional information helpful to City of Lakewood. We are not bound to accept the lowest priced response if that response is not the most advantageous to us as determined solely by City of Lakewood. A Review Board, selected by the City, will evaluate the SOQs received by the submittal deadline. The firms that demonstrate the best ability to meet our needs may be invited to interview if deemed necessary. The Review Board shall rank the Consultants based on the scoring criteria listed below for the various sub-disciplines.

Completeness of Proposal: Any response that does not contain each element described in this RFQ, fully completed, initialed or executed, as appropriate, may be judged incomplete and may not be considered further.

Scoring Criteria:

- A. Individual or Firm's Qualifications and Experience
- B. Approach and Understanding of the Scope of Work
- C. Expertise in regulatory compliance and Stormwater Management
- D. Ability to manage program funding and multi-jurisdictional coordination
- E. Experience: References and a demonstrated record of success by the Consultant on similar work performed for municipalities.

SECTION 7 - CONTRACT

If the proposed fees are determined to be excessive, the City reserves the right to negotiate both scope of work and fees with the selected consultant.

The City does not guarantee, either expressly or by implication, that any work or services will be required under this Agreement.

Any increase in the scope of an assignment shall be approved in advance by the Public Works Director or her representative in writing. No fee adjustment will be allowed unless said prior written approval has been issued.

Consultant will be required to sign the City's standard Professional Services Agreement, a copy of which is included in Attachment 'A'. The City's insurance requirements are included in the standard agreement.

AGREEMENT FOR SERVICES

BETWEEN

CITY OF LAKEWOOD AND

SERVICE PROVIDER

THIS AGREEMENT, made and entered into this _____, by and between the CITY OF LAKEWOOD, a municipal corporation, sometimes hereinafter referred to as CITY, and _____, sometimes hereinafter referred to as SERVICE PROVIDER,

WITNESSETH:

WHEREAS, the CITY is in need of the on-call services for PROGRAM MANAGEMENT, and said _____ is desirous of providing said services;

NOW, THEREFORE, in consideration of the foregoing recitals, the parties hereto do mutually agree as follows:

1. Scope of Services.

SERVICE PROVIDER agrees to provide to CITY at his own cost and expense when requested by CITY those services set forth on Exhibit A attached hereto and made a part hereof, with scope of work and fee based on project-specific written proposals. Budgeted projects where the fee is less than \$50,000 may be authorized by the City Manager. Budgeted projects where the fee exceeds \$50,000 will require written

approval by the City Council. If there is a conflict between Exhibit A, Agreement for Management and Administrative Services, and the provisions of this contract, this contract supersedes.

2. Compensation for Services.

The CITY agrees to pay SERVICE PROVIDER for all services rendered under the Scope of Services. For and in consideration of the services performed by SERVICE PROVIDER and when approved by the City, the City agrees to pay to SERVICE PROVIDER on a time and material basis, at a rate determined by the Schedule attached, for services actually rendered. SERVICE PROVIDER shall submit invoices to the Director of Public Works for approval prior to authorization of payment.

3. Independent Contractor.

It is expressly understood and agreed that SERVICE PROVIDER has been retained, at his request, as an independent contractor, as distinguished from an employee or agent of the CITY to perform the aforementioned services. SERVICE PROVIDER acknowledges the independent contractor relationship and releases the CITY from any liability or obligation to make deductions or withholding from his compensation in respect to unemployment, income taxes, disability, social security, health or pension matters.

SERVICE PROVIDER acknowledges his independent contractor's status in performing said services, and agrees to bear the risk of property damage or loss to any property arising out of the work site, the place to work, or the duties bestowed upon SERVICE PROVIDER pursuant to this Agreement, and does hereby release the CITY, its officers and personnel from any liability to SERVICE PROVIDER for any loss or damage thereby incurred, except where said loss or damage was caused by the CITY.

4. Termination.

Either party to this Agreement may terminate the same at any time by giving the other at least thirty (30) days' written prior notice thereof. In the event of termination, the CITY shall pay to SERVICE PROVIDER the total value of the services of SERVICE PROVIDER to the final date of termination computed in accordance with the terms and provisions of this Agreement.

5. Term

This Agreement shall be for a term commencing _____ and terminating _____, and may be renewed by the CITY with the concurrence of SERVICE PROVIDER for any successive one-year term, unless sooner terminated as hereinbefore provided.

6. Assignment.

SERVICE PROVIDER shall not assign the performance of this Agreement, nor any part thereof, nor any monies due hereunder, without the prior written consent of the CITY.

7. Ownership of Documents.

It is understood and agreed the CITY has full and complete and absolute title to all plans, drawings, reports, and other documents supplied by the CITY to SERVICE PROVIDER during the course of this Agreement, or prepared by SERVICE PROVIDER for the CITY during the course of this Agreement.

8. Insurance.

During the term of this Agreement, SERVICE PROVIDER shall maintain in full force and effect, and deposit with the CITY, insurance or certificate of insurance, which shall evidence the fact that SERVICE PROVIDER has in full force and effect a comprehensive personal injury and property damage policy protecting SERVICE PROVIDER and the CITY from liability for personal injury and property damage arising from the performance of duties under this Agreement, including the operation of any vehicle, in the amounts of two million dollars (\$2,000,000), combined single limits. Said policy shall contain a provision that the same cannot be canceled without at least thirty (30) days notice to the CITY thereof and shall name the CITY as additional insured.

9. Indemnity.

SERVICE PROVIDER shall indemnify and save the CITY harmless from any suits, claims or actions brought by any person or persons, including his agents or employees, for or on account of any injuries or damages or other loss, cost or expense caused by the negligent or wrongful act or omission of SERVICE PROVIDER, his agents and employees, or his subcontractors and the agents and employees thereof, arising out of the services to be performed by SERVICE PROVIDER pursuant to this Agreement.

10. Assumption of Risk.

SERVICE PROVIDER does hereby assume all risks to himself, his personnel, subcontractors and agents, and any employees thereof, of personal injury or death, and all risk of property damage or loss to any property, wares, vehicles, or materials owned or possessed by SERVICE PROVIDER and said SERVICE PROVIDER further releases the CITY, its officers and employees, from any liability therefor.

12. Reservation of Rights.

Nothing in this Agreement shall be deemed to bind the CITY to any course of conduct other than its obligation hereunder to pay SERVICE PROVIDER for said services rendered. It is understood the CITY reserves complete right within its discretion to reject all or any part of any design, plan, specification or recommendation made to it, or submitted by said SERVICE PROVIDER. It is further understood that acceptance herein by the CITY of any design, plan, specification or recommendation of SERVICE PROVIDER shall be for the purpose of compensating SERVICE PROVIDER only, and shall not be binding on the CITY as to any other further course of action. The CITY reserves the complete right to authorize additional, other or independent SERVICE PROVIDER services or studies, and it is agreed that SERVICE PROVIDER does not have any exclusive rights to said services from the CITY.

13. Notice.

Any notice required to be given hereunder shall be deemed to have been given by depositing said notice in the United States mail in an envelope with postage prepaid thereon, addressed as follows:

To the CITY: CITY CLERK
CITY OF LAKEWOOD
5050 N. CLARK AVE.
LAKEWOOD, CA 90712

To the SERVICE PROVIDER: _____

IN WITNESS WHEREOF, the parties hereto have caused this Agreement to be executed as follows:

SERVICE PROVIDER

CITY OF LAKEWOOD

SERVICE PROVIDER

MAYOR

APPROVED AS TO FORM:

ATTEST:

CITY ATTORNEY

CITY CLERK



Los Angeles Gateway Region
Integrated Regional Water Management
Joint Powers Authority

ATTACHMENT 'B'

REQUEST FOR QUALIFICATIONS

Notice is hereby given that Statement of Qualifications (SOQs) will be received from firms for **Operations, Maintenance, and Evaluation of Five (5) Regional Stormwater Capture and Treatment Projects.**

Responses to this Request for Qualifications (RFQ) will be accepted until **5:00 PM PDT on Wednesday, June 5, 2024.** It is the responsibility of the proposer to ensure that any qualifications submitted have sufficient time to be received prior to the due date and time.

SOQs shall be submitted electronically only. No hardcopies will be accepted.

Proposers shall submit one **(1) electronic file (.pdf)** of the SOQ via email to: **madelineanderson.gateway@gmail.com.**

Late SOQs will not be considered.

Key RFQ Dates (Subject to change at discretion of GWMA):

Release Date	May 1, 2024
Questions Due to GWMA	May 17, 2024 at 5:00 PM PDT
Posting of the Q&A	May 27, 2024
SOQ Due Date	June 5, 2024 at 5:00 PM PDT
SOQ Review	June 2024
Presented to GWMA Board	July 2024

Adriana Figueroa (Paramount), Board Chair • Kelli Pickler (Lakewood), Vice-Chair • Thomas Bekele(Signal Hill), Secretary/Treasurer
Proudly serving Gateway cities and agencies in Southeastern Los Angeles County

Members: Artesia · Bell · Bell Gardens · Bellflower · Central Basin Municipal Water District · Cerritos · Commerce · Compton · Cudahy · Downey
Hawaiian Gardens · Huntington Park · La Mirada · Lakewood · Long Beach · Long Beach Water Department · Lynwood · Maywood · Montebello · Norwalk · Paramount
Pico Rivera · Port of Long Beach · Santa Fe Springs · Signal Hill · South Gate · Vernon · Water Replenishment District of Southern California · Whittier

With Technical Support From The Sanitation Districts Of Los Angeles County



Contents

1. INTRODUCTION AND SUMMARY	1
1.1. PROJECT SUMMARIES.....	2
1.1.1. Bolivar Park.....	2
1.1.2. Mayfair Park.....	2
1.1.3. Ruth R Caruthers Park.....	3
1.1.4. Sub Basin 4.....	3
1.1.5. Urban Orchard.....	3
2. SCOPE OF WORK.....	4
2.1. BOLIVAR PARK PROJECT.....	5
2.1.1. Recommendations to Improve Bolivar Park Operations and Maintenance.....	8
2.2. MAYFAIR PARK PROJECT.....	9
2.2.1. Recommendations to Improve Mayfair Park Operations and Maintenance.....	12
2.3. RUTH R CARUTHERS PARK PROJECT.....	13
2.3.1. Recommendations to Improve Caruthers Park Operations and Maintenance.....	15
2.4. SUB BASIN 4 (AIRPORT) PROJECT.....	16
2.4.1. Recommendations to Improve Sub Basin 4 Operations and Maintenance.....	18
2.5. URBAN ORCHARD PARK PROJECT – EXPECTED TO BE OPERATIONAL AS OF DECEMBER 2024.....	19
2.5.1. Recommendations to Improve Urban Orchard Operations and Maintenance.....	21
3. CONTRACT TERM AND PREVAILING WAGE	22
4. MINIMUM BIDDER REQUIREMENTS.....	22
5. ESTIMATE OF ANNUAL COSTS	22
6. DISCHARGES TO THE SANITARY SEWER	22
7. PROJECT HARDWARE, SOFTWARE AND OFFICE EQUIPMENT	22
8. RFQ CONTACT	23
9. PERMITS.....	23
10. ASSISTANCE TO BIDDERS WITH A DISABILITY.....	23
11. SCHEDULE.....	23
12. QUESTIONS REGARDING THE RFQ	23
13. CONFLICTS OF INTEREST.....	24
14. STATEMENT OF QUALIFICATION SUBMISSION	24
15. MISCELLANEOUS	26



Table of Contents (continued)

EXHIBIT A - ILLUSTRATIVE SCHEMATIC FOR EACH OF THE PROJECT SITE 27

**EXHIBIT B - PHOTOS OF EXISTING O&M EFFORTS (PLASTIC BAGS IN PUMPS, SLUDGE IN STORAGE
VAULTS, ETC.) 33**

EXHIBIT C - LINKS TO O&M MANUALS 35

EXHIBIT D - BMP ENGINEERING RECOMMENDATIONS 36

EXHIBIT E- SCADA IMAGES 37



1. Introduction and Summary

The Gateway Water Management Authority (GWMA), a California joint powers authority, on behalf of the member agencies of the Los Cerritos Channel (LCC), Lower Los Angeles River (LLAR), and Lower San Gabriel River (LSGR) Watershed Management Groups (WMGs), is releasing this Request for Qualifications (RFQ) in order to solicit qualifications and pricing from engineering/contracting firms with stormwater and wastewater experience for the:

- Operation and Maintenance (O&M) of five existing regional stormwater capture infrastructure systems (regional projects), which have been designed to reduce the level of pollutants in urban and stormwater runoff (primarily through sediment and trash removal); and
- Evaluation of the five regional projects and preparation of recommendations for operational modifications to the regional projects to reduce the future operating costs. Unless otherwise noted herein, structural modifications and improvements to the regional projects are outside of the scope of this RFQ.
- Firms that were involved in project design and preparation of this RFQ are not permitted to respond to this RFQ.

The Regional Projects are: Bolivar Park, Ruth R. Caruthers Park, Mayfair Park, Sub Basin 4 (Long Beach Airport) and Urban Orchard, as further described below.

The purpose of this RFQ is to assist the WMG members in contracting with a qualified firm to provide the above-references services. Thus, it is a two-part selection process:

1. GWMA is requesting qualifications and cost estimates and will conduct an initial screening of submittals received.
2. The names of the qualified firm or firms will be provided to the individual municipalities with jurisdiction over each of the regional projects (jurisdictional municipalities). The selected firm(s) will negotiate with and enter into separate agreements with the respective jurisdictional municipalities.

Firms may submit Statement of Qualifications (SOQs) for one or more of the regional projects. The selected firm(s) shall be responsible for maintaining the equipment, including but not limited to: sensors, monitors, pumps, valves, removing sediment and trash from structures, control systems, water harvesting systems and other equipment as necessary as well as adherence to Los Angeles County Flood Control District (LACFCD), Sanitation Districts of Los Angeles County and Public Health Department Permits.

Responding firms are advised that additional regional projects are expected to come online over the next five to ten years. These projects may include, but are not limited to: Hermosillo Park, El Dorado Park, Furman Park, Spane Park, John Anson Ford Park, Apollo Park, Independence Park, Cerritos Sports Complex Park, Lynwood City Park, Heartwell Park, Skylinks Park and Salt Lake Park. The selected firm(s) may be asked at some future time to respond to a request for operation and maintenance services.



1.1. Project Summaries

1.1.1. Bolivar Park

Located at:
3300 Del Amo Blvd
Lakewood, CA 90712

The Bolivar Park Regional Stormwater Project is located in the Bolivar municipal park in the City of Lakewood. Underlying a significant portion of this park is a 7.5 ac-ft subsurface storage and infiltration system. Wet and dry weather flows are diverted from a nearby LACFCD 48" Reinforced Concrete Pipe (RCP) channel. This regional project's major components include:

- Rubber diversion dam (base raised 3")
- Grated drop inlet and diversion valve
- Nutrient Box pretreatment unit
- Pump Station with 4 pumps
- 8.9 ac-ft subsurface storage and infiltration gallery
- Wet well with 3 pumps
- Water harvesting unit (WAHASO) with connection to the Park's irrigation system
- Overflow discharge pump back to the Flood Control System
- Water harvesting system
- Discharges to Flood Control System

1.1.2. Mayfair Park

Located at
5720 Clark Ave
Lakewood, CA 90712

The Mayfair Park Regional Stormwater Project is located in the Mayfair municipal park in the City of Lakewood. Similar to Bolivar, underlying a significant portion of the park is a 13.8 ac-ft underground stormwater capture and infiltration facility. The regional project receives both wet and dry weather flows from a diversion structure, located in a nearby covered LACFCD Reinforced Concrete (RC) Channel (23'W x 11"-6'H). The regional project's major components include:

- 23'W x 3'H Rubber Diversion dam
- Grated drop inlet and Diversion valve
- Pretreatment unit
- 13.8 ac-ft subsurface storage unit
- Outlet valve and a wet well with 3 pumps
- Water harvesting unit (WAHASO) with connection to the Park's irrigation system
- Kraken discharge treatment unit
- Back-up Sanitary discharge line (The city has obtained a discharge permit from the Sanitation Districts)
- Treatment unit building with RC Controls



1.1.3. Ruth R Caruthers Park

Located at:
10500 Flora Vista St
Bellflower, CA 90706

The Ruth R Caruthers Park Regional Project is located at Ruth R Caruthers Park in the City of Bellflower. The park is underlain by a 9 ac-ft stormwater capture and infiltration system. Unlike Bolivar and Mayfair, it diverts wet and dry weather runoff from two LACFCD drains. One diversion point is the 38'W x 9'H channel to the east. The second diversion point is a 72" RCP FCD storm drain located to the south of the project. Existing major infrastructure components include:

FSD Line A (east)

Flush mounted 38'x3'10" rubber dam
Grated drop inlet structure
Diversion valve
Pretreatment unit

FCD 72" RCP

Rubber dam
Grated drop inlet structure
Diversion valve
Pretreatment unit

Storage Infiltration gallery

3-way plug valve
Pump station
Post-treatment system

1.1.4. Sub Basin 4

Located on the Long Beach Airport property

The major runoff treatment component is a 14 ac-ft subsurface storage and infiltration system. Wet and dry weather flows are diverted from a nearby LACFCD channel. The regional project's major components include:

- A grated inlet structure
- Flow Splitter Vault
- Two JDS pre-treatment systems
- 14 ac-ft storage and infiltration vault

1.1.5. Urban Orchard

Located at:
9475 West Frontage Road
South Gate CA 90280

This project differs from the above-named projects as it diverts wet and dry weather flows from the Badini Channel first to a constructed treatment wetland and a subsurface storage reservoir; a water quality pre-treatment hydrodynamic separator; and a stormwater harvesting system including additional filtration and a pump to provide irrigation for the orchard and buffer trees. This project is expected to be operational in December 2024. The selected firm will need to coordinate closely with the City of South Gate's Water and Park and Recreation Departments so



as not to overlap operations and maintenance efforts. The selected firm's responsibilities will be the operation and maintenance of:

- The diversion structure in the Bandini Channel
- Pumps to the hydrodynamic separators
- Pumps to the constructed wetlands
- 2.52 ac-ft storage gallery
- Water Harvesting System
- Water overflows and discharge system
- All pumps, valves, sensors, and monitors related to the above

2. Scope of Work

The primary purpose of these regional projects is the improvement of water quality of wet and dry weather urban runoff in the downstream receiving waters (i.e. Flood Control Channels and storm drains). This is accomplished primarily by capturing sediments and trash entrained in the runoff and allowing them to settle out. This is supplemented by various monitors, sensors, filters, screens, pumps, settling galleries as well as pre and post treatment systems and water harvesting systems that must be kept in operating condition.

The selected firm(s) will operate and maintain the system in such a manner as to capture (within the capabilities of the equipment as designed and installed) 100 percent of dry weather flows and in wet weather and when feasible up to the design capacity of each project per storm event.

Tracking and monitoring the amount of water captured and treated is an important component of this project:

- Twice a year, the respondent shall report the volume of water imputed to the system and the volume of treated water discharged and other related information as requested by the jurisdictional municipality.
- For the period January through June, the report will be due September 15 of the same year.
- For the period July through December, the report will be due March 15 of the following year.
- The respondent shall conduct required Department of Public Health testing for any applicable water harvesting systems, ponds and wetlands that are receiving harvested water and inlet and outlet testing to Municipal Separate Storm Sewer System (MS4) and Coordinated Integrated Monitoring Program (CIMP) requirements where applicable testing.

Exhibit C contains links to Operations and Maintenance manuals for each of the five (5) regional projects. Below are notes from city maintenance staff regarding their operational experience of the past few years.



2.1. Bolivar Park Project

Note that this project originally had an infiltration component, but the infiltration rates have significantly decreased and this will now be operated primarily as a storage and settling vault.

Bolivar Park Project Operation and Maintenance					
#	Task Name	Description	Inspection Frequency	Cleaning/ replacement Frequency	Notes
1a	Diversion Structure and Rubber Dam	Rubber dam raised to capture water, lowered to flush trash and algae.	Before and after rain events and 1x per month minimum.	1x per month during the wet season 1x per qtr. during dry season.	<ul style="list-style-type: none"> - Rubber dam has a 3-inch lip, so there's problems with mosquitoes in the stagnant water. The system manager usually needs to flush the water. -System does not usually have enough dry weather flow, so system manager may need to accumulate flow until there is enough. - Channel may fill with trash and debris, needs to be cleared 1x per month with vacuum.
1b	Diversion Structure and Rubber Dam	TSS sensor	Before and after rain events and 1x per month minimum.	Cleaning as needed.	TSS sensor monitoring inlet flows is not working and needs to be repaired or replaced (Responding firm needs to specify replacement model and costs including installation labor).
2a	Motor Operated Valve	Regulates flow, knife-gate valve	1x per month	Cleaning quarterly minimum.	This knife-gate valve is in a vault 25 feet below the surface in a confined space. It is currently unable to be closed through SCADA. The valve does not shut properly, resulting in leaking.
3	Pre-Treatment Unit	Bio Clean Nutrient Separating Baffle Box (NSBB) is the first point of treatment.	After major storm events or 1x per month during wet season (whichever is more frequent), and once during dry season.	4x per year	<ul style="list-style-type: none"> -This unit has been Retrofitted to reduce bypass and the unit can be difficult to clean out. Prospective respondents are advised that previous maintenance efforts have experienced accessibility, lighting, and ventilation issues. - Estimated 38 cubic yards will be removed for cleaning.



Bolivar Park Project Operation and Maintenance

#	Task Name	Description	Inspection Frequency	Cleaning/ replacement Frequency	Notes
4	Inlet Pump Station	High flow pump discharges during storm events. Low flow pump only discharges dry weather flows and operates more frequently.	Clean and inspect before and after every rain event and every 6 months minimum.	Clean after every rain event and replace as needed.	Due to low dry-weather flows not activating pumps. Pumps need to be cycled regularly.
5	Subsurface Settling and Infiltration Gallery)	Sediment and debris are carried over the weir wall before full settling.	2x per year at the start and end of the rainy season.	1x per year	<ul style="list-style-type: none"> - Prospective respondents are advised that there are accessibility, lighting, and ventilation issues. - Hard to maintain and clean due to 1) lack of ventilation, 2) length of vacuum truck hose, 3) lack of access manholes, and debris that bypassed the settling basin. - Infiltration is not working due to fine sediment plugging infiltration pores.
6	Motor Operated Valve	An actuated valve connected from infiltration area that allows water to move into wet well to be pumped to stormwater harvesting system or back to the channel.	Before and after rain events and 1x per month minimum.	As needed, quarterly minimum.	<ul style="list-style-type: none"> - Not working remotely, only operated manually - in a confined space. - The valve vault and electrical box accumulates water, shortening the electrical system and corroding wiring from box down to valve.



Bolivar Park Project Operation and Maintenance

#	Task Name	Description	Inspection Frequency	Cleaning/ replacement Frequency	Notes
7	Multi-Media Stormwater Harvesting Facility (WAHASO System)	<p>There are 4 stages: 1) self-backwashing Tekklen filters, 2) bag filters, 3) activated carbon filter media, and 4) ultraviolet (UV) treatment. City evacuates storage water to infiltration area when bacteria exceedances occur-happens often and WAHASO hasn't been operational since June 2022.</p> <p>Valves are hydraulically (water) operated.</p>	Inspection shall occur monthly at minimum, or more frequently if needed and include: filter bags, UV bulbs, and sampling.	Every other day during wet weather, not in use as of now. Filter Bags should be replaced 1/day during wet weather, UV bulb: 1/yr or as needed, per sampling plan.	<p>NOTE: City staff is expending a considerable effort to maintain the water harvesting system. Concurrent with starting O&M, the selected firm shall provide an evaluation of the potential for:</p> <ul style="list-style-type: none"> • continued operation of the water harvesting unit or • converting to a ultra-filtration SB-966 compliant system • or permanently taking the water harvesting system offline. <p>- Bag filters clogged frequently. - Media is approx. 1/3 of the intended size system continues to have poor water quality and can't UV treat. - Turbidity sensor and flow meter are broken, pH sensor needs recalibration, intake filters have failed, and mechanical issues with irrigation pumps not sending water to WAHASO (likely due to clogging). - Media in the vessels is approaching its end-life and needs to be replaced. - Operators will consider the option of diverting captured flow to sanitary sewer for treatment.</p>
8	Irrigation Pump and Discharge Pump	Pumps B1 and B2 deliver water to harvesting facility. A separate ejector pump (B3) discharges up to 5 cfs to FCD drain.	1x per month	As needed	<p>- Problem is that high salt content causes sprinklers to breakdown quickly. - Reclaimed water is directed back to the storage gallery if it fails to pass the BacT test. Two pumps have been replaced in wet well. Cages installed to protect irrigation pumps.</p>



2.1.1. Recommendations to Improve Bolivar Park Operations and Maintenance

Within one year of beginning operations, the selected firm shall provide recommendations and estimated costs for operational and structural improvements, including improvements to the infiltration aspects that can be made to operate this regional project in a more cost-effective manner while maintaining the goal of improving the quality of urban and stormwater runoff in the main channels. The jurisdictional municipality reserves the right to select another firm to install any recommended improvements. A preliminary report to this effect is included in Exhibit D.



2.2. Mayfair Park Project

Mayfair was intentionally designed as a storage and settling facility, it has no infiltration capacity.

Mayfair Park Operations and Maintenance					
#	Task Name	Description	Inspection Frequency	Cleaning/ replacement Frequency	Notes
1	Diversion Structures and Rubber Dam	a. Air-inflatable rubber dam in Del Amo Channel). b. Grated Drop Inlet Diversion Structure.	Before and after rain events and 1x per month minimum.	1x per month during the wet season 1x per quarter during dry season.	- Rubber dam can be retracted to be flush with the channel floor. - Channel may fill with trash and debris. - Last cleaned November 29, 2023.
2	Motor Operated Valve	Regulates flow, knife-gate valve.	Before and after rain events and 1x per month minimum.	Cleaning quarterly minimum.	- Manhole access to both settling and storage are buried 4 feet under an active baseball field. - Access to knife gate is in a manhole with no ladder installed. - Knife gate does not fully close, allowing water to enter NSBB area. - Maintenance will need to be timed to avoid active recreation and soil will need to be replaced.



Mayfair Park Operations and Maintenance					
#	Task Name	Description	Inspection Frequency	Cleaning/ replacement Frequency	Notes
3	Pre-Treatment Unit	<p>a. Bio Clean Nutrient Separating Baffle Box (NSBB) is the first point of treatment.</p> <p>b. Has been retrofitted with screen to reduce larger debris.</p>	After major storm events or 1x per month during wet season (whichever is more frequent), and once during dry season.	4x per year.	<p>- Accessibility, lighting, ventilation issues. Unit is approximately 25 feet deep with narrow accessway.</p> <p>- No ladder to NSBB.</p> <p>- The unit is not fully operational, pre-treatment unit has not been cleaned.</p>
4	Subsurface Storage Structure	13.8 ac-ft underground storage reservoir to provide initial detention before the captured stormwater is pumped for irrigation onsite or infiltrated into the underlying soils. City staff can send water from storage to the wet well via the actuated valve.	2x per year at the start and end of the rainy season.	1x per year.	<p>- Top of the access way is buried approximately 4 feet under a baseball field. Maintenance will need to be timed to avoid active recreation periods soil will need to be replaced and, at a minimum, hand compacted. No access to settling basin.</p> <p>- Hard to maintain and clean due to 1) lack of ventilation, 2) length of Vactor truck hose, 3) lack of access manholes, and debris that bypassed the settling basin needs to be removed.</p> <p>- High organic contents/debris impact harvesting units.</p>
5a	Post BMP Pump Station	Convey the captured stormwater for treatment and subsequent irrigation, or for filtration and return to the Clark Channel. Mayfair has no infiltration, only settling and storage.	After major storm events or monthly during wet season and once per dry season.	Clean annually in advance of wet season and replace every 20 years.	Exercise monthly during dry season.



Mayfair Park Operations and Maintenance					
#	Task Name	Description	Inspection Frequency	Cleaning/ replacement Frequency	Notes
5b	Motor Operated Valve	An actuated valve connected to infiltration area allows water to move into wet well, to be pumped to stormwater harvesting system or back to the channel.	Before and after rain events and 1x per month minimum.	As needed, quarterly minimum.	<p>- Not working remotely, partially works manually.</p> <p>- The valve vault and electrical box accumulates water, shortening the electrical system and corroding wiring from box down to valve.</p> <p>- Suggest a lip above the electric box.</p> <p>- Mayfair is using compressed air to keep vessels pressurized. Bolivar is using water.</p>
6	Stormwater Harvesting Facility (WAHASO System)	<p>a. Nearly identical unit as Bolivar. 4 stages: 1) self-backwashing Tekklen filters, 2) activated carbon filter media, and 3) ultraviolet (UV) treatment.</p> <p>b. Undergoing final certification testing for the Public Health Department. Has yet to go fully online.</p> <p>c. Valves are controlled by compressed air.</p>	Inspection shall occur monthly at minimum, or more frequently if needed, and, UV bulbs, and sampling.	Every other day during wet weather, not in use as of now and filter bags should be replaced once per day during wet weather, UV bulb: 1x per year or as needed, per sampling plan.	<p>NOTE: City staff is expending a considerable effort to maintain the water harvesting system. Concurrent with starting O&M, the selected firm shall provide an evaluation of the potential for:</p> <ul style="list-style-type: none"> • Continued operation of the water harvesting unit or • converting to an ultra-filtration SB-966 compliant system or • permanently taking the water harvesting system offline.
7	Irrigation Pump and Discharge Pump	<p>Pumps are required to convey captured stormwater for irrigation or diversion to the stormwater channel for emergency evacuation.</p> <p>a. Irrigation use: 2 submersible pumps capable of 200 GPM to the</p>	1x per month.	As needed.	- Mayfair already has a recycling water irrigation system but is undergoing a test for County Health to use the collected water. They are expected to be complete by the end of 2024.



Mayfair Park Operations and Maintenance					
#	Task Name	Description	Inspection Frequency	Cleaning/ replacement Frequency	Notes
		irrigation system. b. Emergency evacuation diversion to the stormwater channel: 1 duty pump capable of 3,150 GPM.			- Site does have the option for discharge to the sanitary sewer. - Reclaimed water is directed back to the storage gallery if it fails to pass the BacT test.

2.2.1. Recommendations to Improve Mayfair Park Operations and Maintenance

Within one year of beginning operations, the selected firm shall provide recommendations and estimated costs for operational and structural improvements, including improvements to the infiltration aspects that can be made to operate this regional project in a more cost-effective manner while maintaining the goal of improving the quality of urban and stormwater runoff in the main channels. The jurisdictional municipality reserves the right to select another firm to install any recommended improvements.



2.3. Ruth R Caruthers Park Project

Note that this project originally had an infiltration component, but the infiltration rates have significantly decreased, and this will now be operated primarily as a storage and settling vault.

Ruth R Caruthers Park Operations and Maintenance					
#	Task Name	Description	Inspection Frequency	Cleaning/ replacement Frequency	Notes
1	Diversion Structures (2) and Rubber Dam	a. Air-inflatable rubber dam (Project 16 Channel) b. Grated Drop Inlet Diversion Structure (Project 16 Channel) c. Junction Drop Inlet Diversion Structure (72" RCP - BI1902)	Before and after rain events and 1x per month minimum.	1x per month during the wet season 1x per qtr. during dry season.	- Caruthers system rubber dam can be retracted to be flush with the channel floor. - Channel may fill with trash and debris and may need to be cleared 1x per month with vacuum.
2	Motor Operated Valve	Regulates flow, knife-gate valve.	Before and after rain events and 1x per month minimum.	Cleaning, quarterly minimum.	
3	Pre-Treatment Unit	Bio Clean Nutrient Separating Baffle Box (NSBB) is the first point of treatment.	After major storm events or 1x per month during wet season (whichever is more frequent), and once during dry season.	4x per year.	-Needs to be retrofitted to prevent bypass and unit can be difficult to clean out. - Accessibility, lighting, ventilation issues.



Ruth R Caruthers Park Operations and Maintenance

#	Task Name	Description	Inspection Frequency	Cleaning/ replacement Frequency	Notes
4	Subsurface Storage Structure (Settling and infiltration Basin)	a. 9 ac-ft underground storage reservoir to provide initial detention before the captured stormwater is pumped for irrigation onsite or infiltrated into the underlying soils. b. City staff can send water from storage to the infiltration area via an actuated valve.	After major storm events or bi-monthly during wet season and 2x per year at the start and end of the rainy season.	1x per year cleaning or as needed.	- Hard to maintain and clean due to 1) lack of ventilation, 2) length of Vactor truck hose, 3) lack of access manholes, and debris that bypassed the settling basin needs to be removed. - High organic contents/debris impact harvesting unit.
5	Motor Operated Valve	An actuated valve connected to an infiltration area that allows water to move into a wet well, to be pumped to a stormwater harvesting system or back to the channel.	Before and after rain events and 1x per month minimum.	As needed, quarterly minimum.	
6	Stormwater Harvesting Facility (WAHASO System)	a. Nearly identical unit as Bolivar and Mayfair. b. 4 stages: 1) self-backwashing Tekklen filters, 2) bag filters, 3) activated carbon filter media, and 4) ultraviolet (UV) treatment. City evacuates storage water to infiltration area when bacteria exceedances occur. c. Valving is controlled electronically.	Inspection shall occur monthly at minimum, or more frequently if needed, and filter bags, UV bulbs, and sampling.	Not in use as of now and Filter Bags should be replaced once per day during wet weather, UV bulb: 1x per year or as needed, per sampling plan.	NOTE: City staff are expending a considerable effort to maintain the water harvesting system. Concurrent with starting O&M, the selected firm shall provide an evaluation of the potential for: <ul style="list-style-type: none"> Continued operation of the water harvesting unit or converting to an ultra-filtration SB-966 compliant system or permanently taking the water harvesting system offline. -Bag filters clogged frequently. - Media is approx. 1/3 of the intended size system continues to have poor water quality and can't UV treat. - Turbidity sensor and flow meter are broken, pH sensor needs recalibration, intake filters have failed, and mechanical issues with irrigation pumps not sending water to WAHASO (likely due to clogging).



Ruth R Caruthers Park Operations and Maintenance					
#	Task Name	Description	Inspection Frequency	Cleaning/ replacement Frequency	Notes
					- Media in the vessels is reportedly nearing its life-expectancy.
7	Irrigation Pump and Discharge Pump	<p>Pumps are required to convey captured stormwater for irrigation or diversion to the stormwater channel for emergency evacuation.</p> <p>a. Irrigation use: 2 submersible pumps capable of 200 GPM to the irrigation system.</p> <p>b. Emergency evacuation diversion to the stormwater channel: 1 duty pump capable of 3,150 GPM.</p>	1x per month.	As needed.	- Reclaimed water is directed back the storage gallery if it fails to pass the BacT test.

2.3.1. Recommendations to Improve Caruthers Park Operations and Maintenance

Within one year of beginning operations, the selected firm shall provide recommendations and estimated costs for operational and structural improvements, including improvements to the infiltration aspects that can be made to operate this regional project in a more cost-effective manner while maintaining the goal of improving the quality of urban and stormwater runoff in the main channels. The jurisdictional municipality reserves the right to select another firm to install any recommended improvements.



2.4. Sub Basin 4 (Airport) Project

Note that this project originally had an infiltration component, but the infiltration rates appear to be negligible, and groundwater appears to be entering the storage/infiltration gallery through the bottom and sides of the gallery effectively negating any infiltration of runoff. Similar to the prior three projects, this gallery will be used primarily for settling and storage.

Sub Basin 4 (Long Beach Airport) Operations and Maintenance					
#	Task Name	Description	Inspection Frequency	Cleaning/ replacement Frequency	Notes
1	Grated Drop Inlet Diversion Structure	The Los Cerritos Channel Diversion Inlet Structure is a rectangular reinforced concrete box (RCB) with a 16' wide by 2.75' high diversion opening. The diversion opening will drop and transition into a 60" diameter reinforced concrete pipe (RCP), which will convey discharge to the Stormwater Flow Splitter Structure. This structure has been built into the sidewall of the existing channel.	Before and after rain events and 1x per month minimum.	1x per month during the wet season 1x per qtr during dry season.	<ul style="list-style-type: none"> - Channel may fill with trash and debris, may need to be cleared 1x/month during rainy season 1x per qtr during dry season. -Currently there is no way to restrict dry weather flows estimated at 100 gpm. Provide a cost estimate to install a slide gate.
2	Stormwater Flow Splitter	The Stormwater Flow Splitter Structure is a rectangular reinforced concrete vault that is used to split flows before pre-treatment. The structure does this by utilizing a split weir, which directs stormwater into the two Jensen Diversion Structure (JDS) Units for treatment. Once the water is treated, the stormwater enters the box again before exiting through the motor activate sluice gate into a 60" RCP.	Before and after rain events and 1x per month minimum.	As needed, quarterly minimum.	<ul style="list-style-type: none"> - The slide gate separating the flow splitter vault and the JDS units does not close properly, which leads to water coming in when maintenance is performed. - There is essentially no bypass mechanism.



Sub Basin 4 (Long Beach Airport) Operations and Maintenance

#	Task Name	Description	Inspection Frequency	Cleaning/ replacement Frequency	Notes
3	Two (2) JDS Pre-Treatment Unit	The two Stormwater Pre-treatment JDS units use vortex concentration and a non-blocking screen to treat flows entering the units. This treatment allows for the capture of trash, debris, and other particulates that affect water quality.	After major storm events or 1x per month during wet season (whichever is more frequent), and once during dry season.	2x per year, contractor cleans.	<ul style="list-style-type: none"> - There is an accumulation of floatables and sediment at the JDS units after storm events, which is expected and indicates the units are working. -Per the O&M staff, the JDS units are cleaned twice a year. The pumping of residual water within is directed to either the inlet of the infiltration gallery or the parallel JDS unit.
	Sluice Gate	Stormwater exiting the flow splitter structure will pass through a motor activated sluice gate. This gate will be used to control the flow rate by changing the position of the gate.	Every 3 months and after runoff events of 0.8 inches or less.	See attached manual.	
4	Flow Meter	Current flow meter is inoperable.	Inspect weekly.	Once a year or as needed, whichever is more frequent.	Flow meter is submerged. Firms will provide installation cost of new meter model.
5a	Subsurface Storage Structure (Settling Basin)	The underground infiltration gallery chambers provide storage capacity to retain stormwater for groundwater infiltration. Each chamber is 14 feet in height. There are also two access shafts that are 10' by 10,' located at the north-eastern and south-western corner of the storage chamber area. For Phase 1 of construction, the approximate storage capacity is 14 acre-feet (ac-ft.).	Annually (during dry months) and after every runoff event once the water has infiltrated and the gallery is dry.	1x per year.	<ul style="list-style-type: none"> -There is persistent water in the structure indicating infiltration is not occurring or is otherwise well below initial expectations. - Access to the galleries is difficult.



Sub Basin 4 (Long Beach Airport) Operations and Maintenance

#	Task Name	Description	Inspection Frequency	Cleaning/ replacement Frequency	Notes
5b	Water Level Sensor	The water level sensor is located inside the underground infiltration gallery and measures the water surface elevation within the chambers. The programmable logic controller is used to operate the sluice gate when the infiltration gallery reaches its storage capacity.	Concurrently with the infiltration gallery inspection. Annually (during dry months) and after every runoff event once the water has infiltrated and the gallery is dry.	As needed.	Level sensor inside the infiltration gallery has a discrepancy of approximately 2.5 feet.
5c	Programmable Logic Controller (PLC)	The PLC is used to control the sluice gate by using the data gathered by the flow meter and the water level sensor. This controller is used to power the motor on the sluice gate to open and close depending on the conditions in the system.	Frequency period: weekly (preferred) or monthly at a minimum.		

2.4.1. Recommendations to Improve Sub Basin 4 Operations and Maintenance

Within one year of beginning operations, the selected firm shall provide recommendations and estimated costs for operational and structural improvements, including improvements to the infiltration aspects that can be made to operate this regional project in a more cost-effective manner while maintaining the goal of improving the quality of urban and stormwater runoff in the main channels. The jurisdictional municipality reserves the right to select another firm to install any recommended improvements. A preliminary report to this effect is included in Exhibit D.



2.5. Urban Orchard Park Project – expected to be operational as of December 2024

Urban Orchard Operations and Maintenance					
#	Task Name	Description	Inspection Frequency	Cleaning/ replacement Frequency	Notes
1a	Bandini Grated Drop Inlet and Low Flow Diversion Structure	Drop Inlet Structure	Before and after major storm events or monthly during wet season, once during dry season.	- Debris removal and vacuum cleaning 3x per wet season, once per dry season after major storm events as needed. -Hydrojetting as needed.	
1b	Actuated Valve Structure		After major storm events or monthly during wet season, once per dry season.	- Debris removal and vacuum cleaning as needed. - Hydrojetting annually or as needed. - Valve maintenance as needed. - Actuator battery replacement every 5 years.	
2a	Diversion Pump Station	Wet well	After major storm, monthly during wet season, once during dry season.	Vacuuming annually or as needed.	
2b	Diversion Pump Station	Valve Operation and Pump Operation		- Cycle monthly (minimum) during the dry season. - Clean and service annually in advance of the wet season.	
3	Hydrodynamic Separator	- -			



Urban Orchard Operations and Maintenance					
#	Task Name	Description	Inspection Frequency	Cleaning/ replacement Frequency	Notes
4a	Pump Station	6-pump configuration	Wet well inspection.		
5a	PreCast Concrete Reservoir	- -	After major storm events (inspect from surface minimum 72 hrs after storm event) or monthly during wet season, once per dry season.		
5b	Sediment Basin			Vacuum cleaning every 2 years or as needed, whichever is more frequent.	
5c	Storage/ Infiltration Chamber			Every 10 years or as needed, whichever is more frequent.	
6	Active Controls		- Monthly or as needed based on receipt of an alert. - Review annually.	As needed.	NOTE: Contractor is required to: <ul style="list-style-type: none"> • Review system status and performance using cloud-based dashboard • Calibrate RTC logic • Renew OptiRTC subscription
7	Post BMP Pump Station	Irrigation Pumps	After major storm, monthly during wet season, once during dry season.	- Cycle monthly (minimum) during dry season. - Clean and service annually in advance of the wet season.	



2.5.1. Recommendations to Improve Urban Orchard Operations and Maintenance

Within one year of beginning operations, the selected firm shall provide recommendations and estimated costs for operational and structural improvements, including improvements to the infiltration aspects that can be made to operate this regional project in a more cost-effective manner while maintaining the goal of improving the quality of urban and stormwater runoff in the main channels. The jurisdictional municipality reserves the right to select another firm to install any recommended improvements.



3. Contract Term and Prevailing Wage

GWMA estimates that each municipality will enter into a contract with a firm for a term of 3 years. This will be determined in the second phase of the selection process by the jurisdictional municipality.

In accordance with the California Prevailing Wage Law (Labor Code Section 1720 et seq.), the Project is a “public works project.” The selected firm(s) and any subcontractors shall pay wages in accordance with the determination of the Director of the DIR regarding the prevailing rate of per diem wages.

4. Minimum Bidder Requirements

The selected firm shall be a qualified California-licensed Contractor or Engineering/Contracting firm with a minimum of 5 years of experience with stormwater or wastewater projects of similar size and complexity. The responding firms shall provide enough detail in their response to enable GWMA and the jurisdictional municipalities to evaluate the ability of the firm to meet or exceed the requirements herein, and perform the Services described in a professional, high-quality manner.

5. Estimate of Annual Costs

The estimate to annually perform the services requested herein is roughly between \$125,000 and \$150,000 per project.

6. Discharges to the Sanitary Sewer

Discharges to any sanitary sewer discharge line are not to occur without first having evidence of a valid discharge permit or other valid permission from the Sanitation Districts of Los Angeles County and the explicit knowledge and approval of a representative of the jurisdictional municipality with the authority to approve such a discharge.

A valid discharge permit or other valid permission from the Sanitation Districts of Los Angeles County and the explicit knowledge and approval of a representative of the jurisdictional municipality must be procured before flow discharges to any sanitary sewer discharge line occur.

7. Project Hardware, Software and Office Equipment

All Regional Projects are equipped with SCADA control system. The respondents will work from their office. It is the responsibility of the respondent to ensure they have all necessary equipment or have included pricing in their SOQ for such equipment to be able to interface and operate successfully through SCADA (Exhibit E (3 SCADA)).

Firm shall provide all labor, materials, tools, equipment, and incidentals for the work. The Firm shall commence the work and related services upon the receipt of a written Notice to Proceed from the jurisdictional municipality. It is the Contractor’s responsibility to provide sufficient and qualified personnel, equipment, and materials.



8. RFQ Contact

All questions are to be directed to the RFQ contact person:

Gateway Water Management Authority
Madeline Anderson
madelineanderson.gateway@gmail.com
Subject: GWMA O&M RFQ

9. Permits

The selected firm(s) are responsible for obtaining all necessary permits, including access permits from LACFCD.

10. Assistance to Bidders with a Disability

Respondents with disabilities will be accommodated as appropriate. Contact the RFQ Contact ten (10) business days prior to the deadline for receipt of a SOQs.

11. Schedule

- RFQ released: **May 1, 2024**
- Deadline for receiving questions: **May 17, 2024 at 5:00 PM PDT**
- Response to questions: **May 27, 2024**
- SOQ due: **June 5, 2024 at 5:00 PM PDT**
- SOQ Review: **June 2024**
- Presented to GWMA Board: **July 2024**

GWMA reserves the right to make changes to the above schedule at the discretion of the GWMA and/or the jurisdictional municipalities.

12. Questions Regarding the RFQ

Any questions will need to be submitted electronically to the RFQ contact person by the deadline specified on the front page and Section 11, "Schedule" of this RFQ.

Responses to questions will be posted on GWMA's website (www.gatewaywater.org) home page under "GWMA News" on the date specified on the front page and Section 11, "Schedule" of this RFQ.

GWMA shall not be responsible for failure to respond to a question or request for clarification and/or comment that has not been properly labeled. Questions received after the stated deadline will not be answered.



13. Conflicts of Interest

GWMA prohibits practices that result in unlawful activity including rebates, kickbacks, or other unlawful considerations. Further, a selected firm may not assist in preparing or assisting the jurisdictional municipality with any portion of its preparation of a request for proposals, request for qualifications, or any other solicitation regarding a subsequent or additional contract with the public entity, including contracts for work proposed to improve the efficiency of each regional project.

14. Statement of Qualification Submission

SOQ format shall be:

Cover Page

Executive summary

Briefly describing the firm's understanding of the O&M and evaluation scope of work, background and experience, ability to perform the work requested, and include the firm's understanding of the scope of work being requested.

Qualifications of Firm and Project Team

- Provide recent experience of the firm's and project personnel on similar projects.
- Qualifications and pertinent licenses and certifications of personal being assigned to this project.
- Qualifications and pertinent licenses and certifications of subcontractors that will be part of the project team.
- Availability of workforce.
- A statement indicating whether the responding firm including team subcontractors has had any contracts terminated within the last five (5) years. If any such terminations exist, the Contractor must include details regarding the contract, the reason for termination, date of termination, and client contact information.
- A statement indicating whether the responding firm including team subcontractors is or has been involved in litigation regarding any contracts to which the responding firm is a party, within the previous five (5) years. If any such litigation exists, the responding firm must include details regarding the contract, the reason for litigation, date of litigation, and client contact information.
- A description of any Prime or Subcontractor formal relationships with GWMA or the jurisdictional municipalities over the last twelve months.

Staffing Approach

Include an organization chart displaying the relationships of the firm and subcontractors related to the services requests and show that the firm has sufficient resources and availability to complete the tasks requests.



References

Provide the name, description, address, and contact information from at least 2 projects of similar size and complexity. Include a brief description of the projects. GWMA and/or the jurisdictional municipalities are likely to contact the references.

Fee

Provide a billing rates sheet for services included but not limited to:

- Materials,
- Hourly staff rates,
- Volume/weight removal, for each anticipated item.

Schedule

Provide an annual timeline for the proposed O&M activities.

Signature Page

The SOQ shall be signed by a representative of the firm with authority to enter into agreements with municipalities.

SOQ Size Limitation

Submittals should be on a separate per project basis. The submitted SOQ is not to exceed 20 MB which is the receiving limit. Respondents may attach links to larger documents referencing experience. GWMA, jurisdictional municipalities and JLHA are not responsible for transmission difficulties.

SOQs must be submitted electronically before 5:00 PM PDT on June 5, 2024.

Gateway Water Management Authority
Attention: Madeline Anderson
Email address: madelineanderson.gateway@gmail.com
Subject Line: GWMA O&M SOQ

SOQs received after the SOQ deadline will not be opened and not be considered. Hard copies will not be accepted.

If the GWMA's Executive Officer, in the Executive Officer's sole discretion, believes there is a need for clarification, the Executive Officer will issue an Addendum. GWMA shall make any changes to the requirements of this RFQ by written addenda only. Changes to the RFQ will be posted on GWMA's website (www.gatewaywater.org) under "GWMA News".



15. Miscellaneous


Respondents shall bear the total cost of the preparation of the SOQs. Neither the GWMA nor the jurisdictional municipalities are under any obligation to, nor will they reimburse responding firms for any expense incurred in the preparation of SOQs. All SOQs submitted to GWMA shall become the property of GWMA City and will not be returned.

GWMA reserves the right to reject any or all SOQs, in whole or in part, and to recommend the statement(s) of qualification to a municipality which, at its sole discretion, is in the best interest of GWMA and the jurisdictional municipality.



Exhibit A - Illustrative Schematic for Each of the Project Site



Mayfair Park

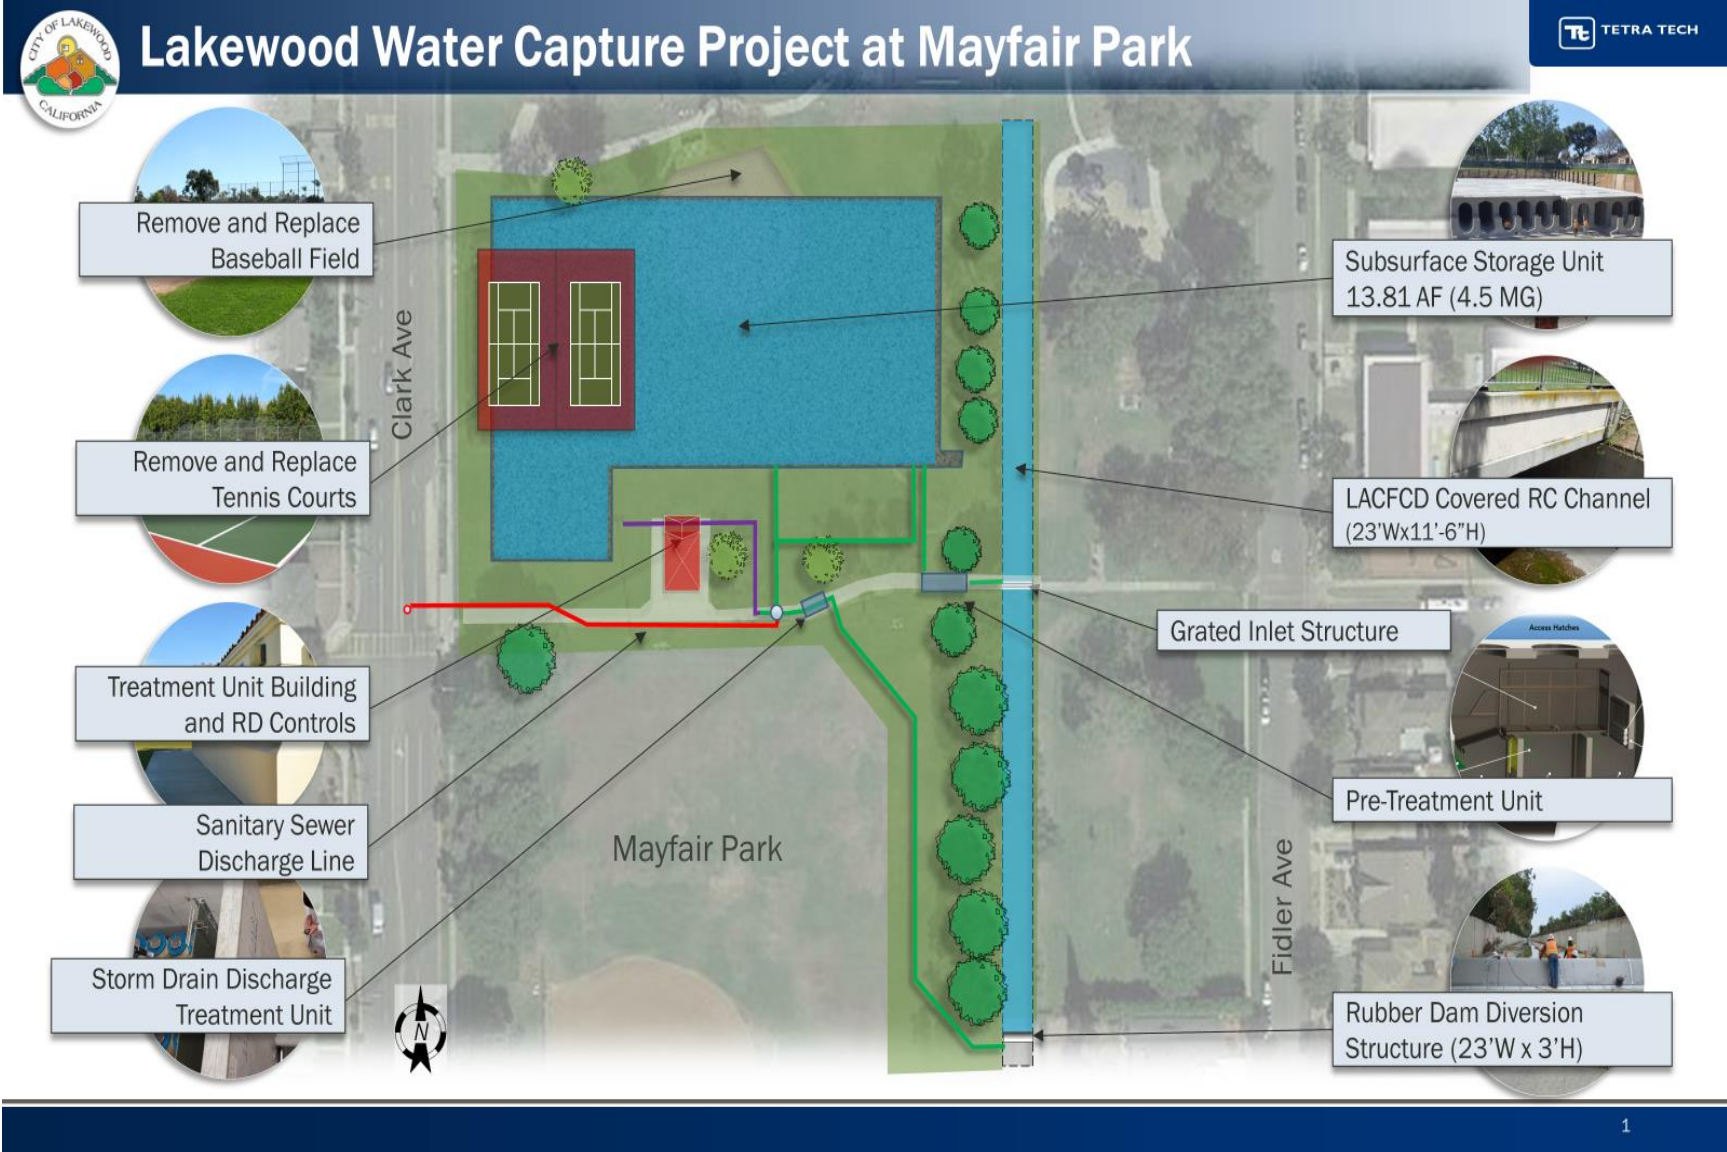

Caruthers Park



Caruthers Park Site Layout

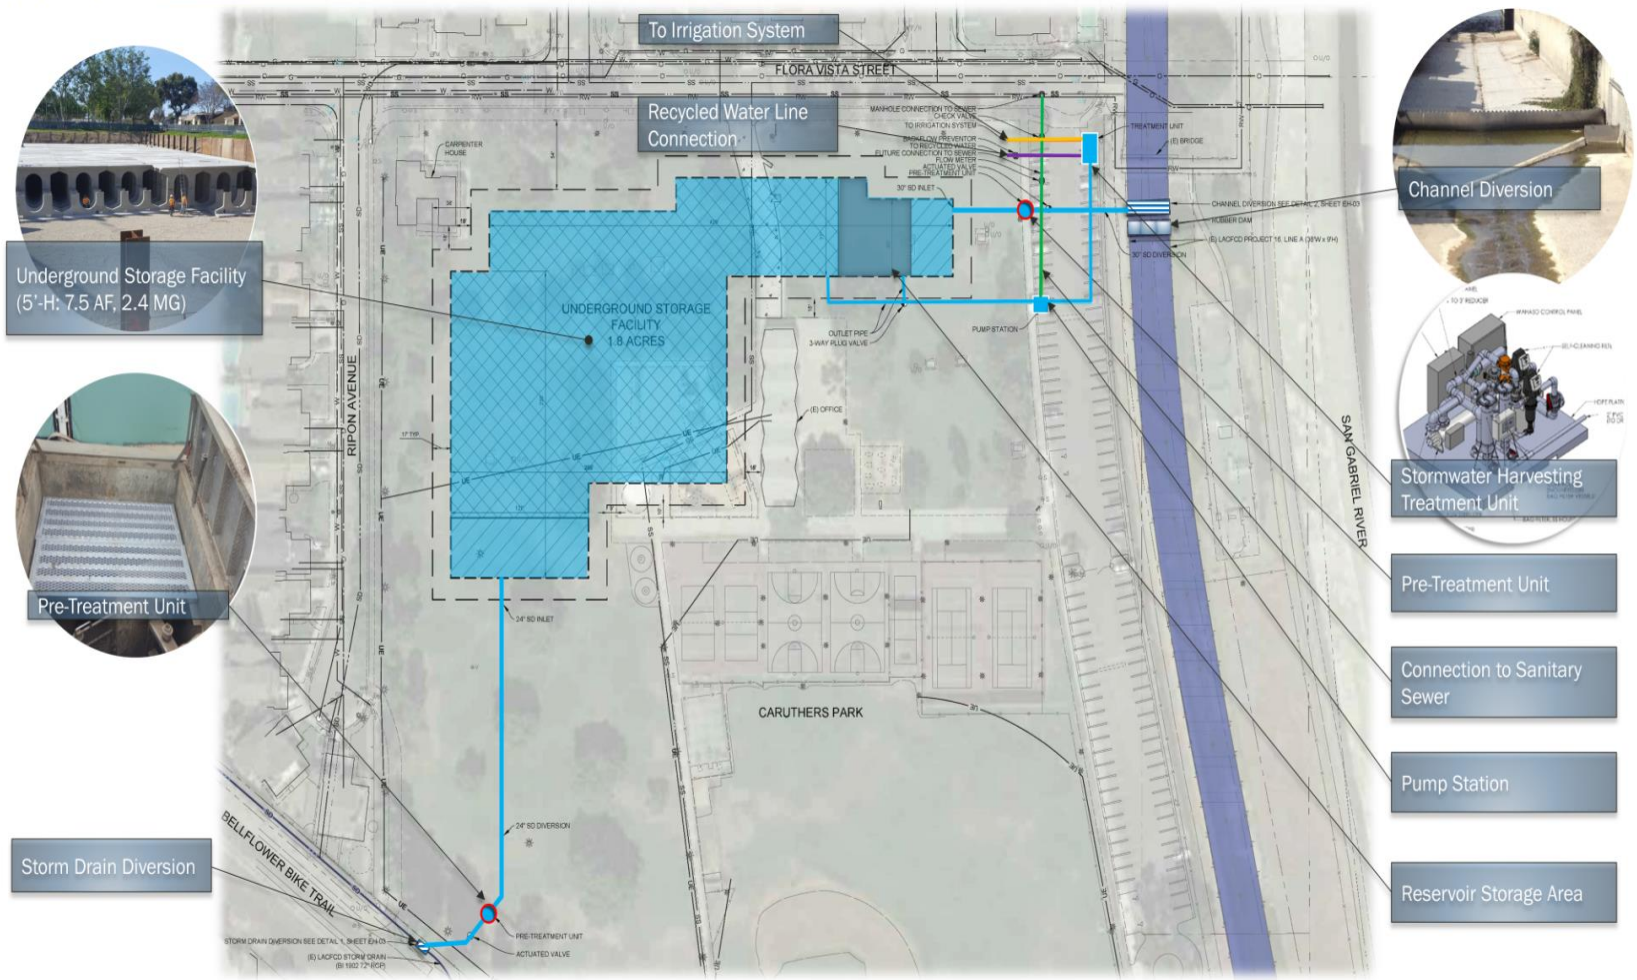


Bolivar Park





Sub Basin 4

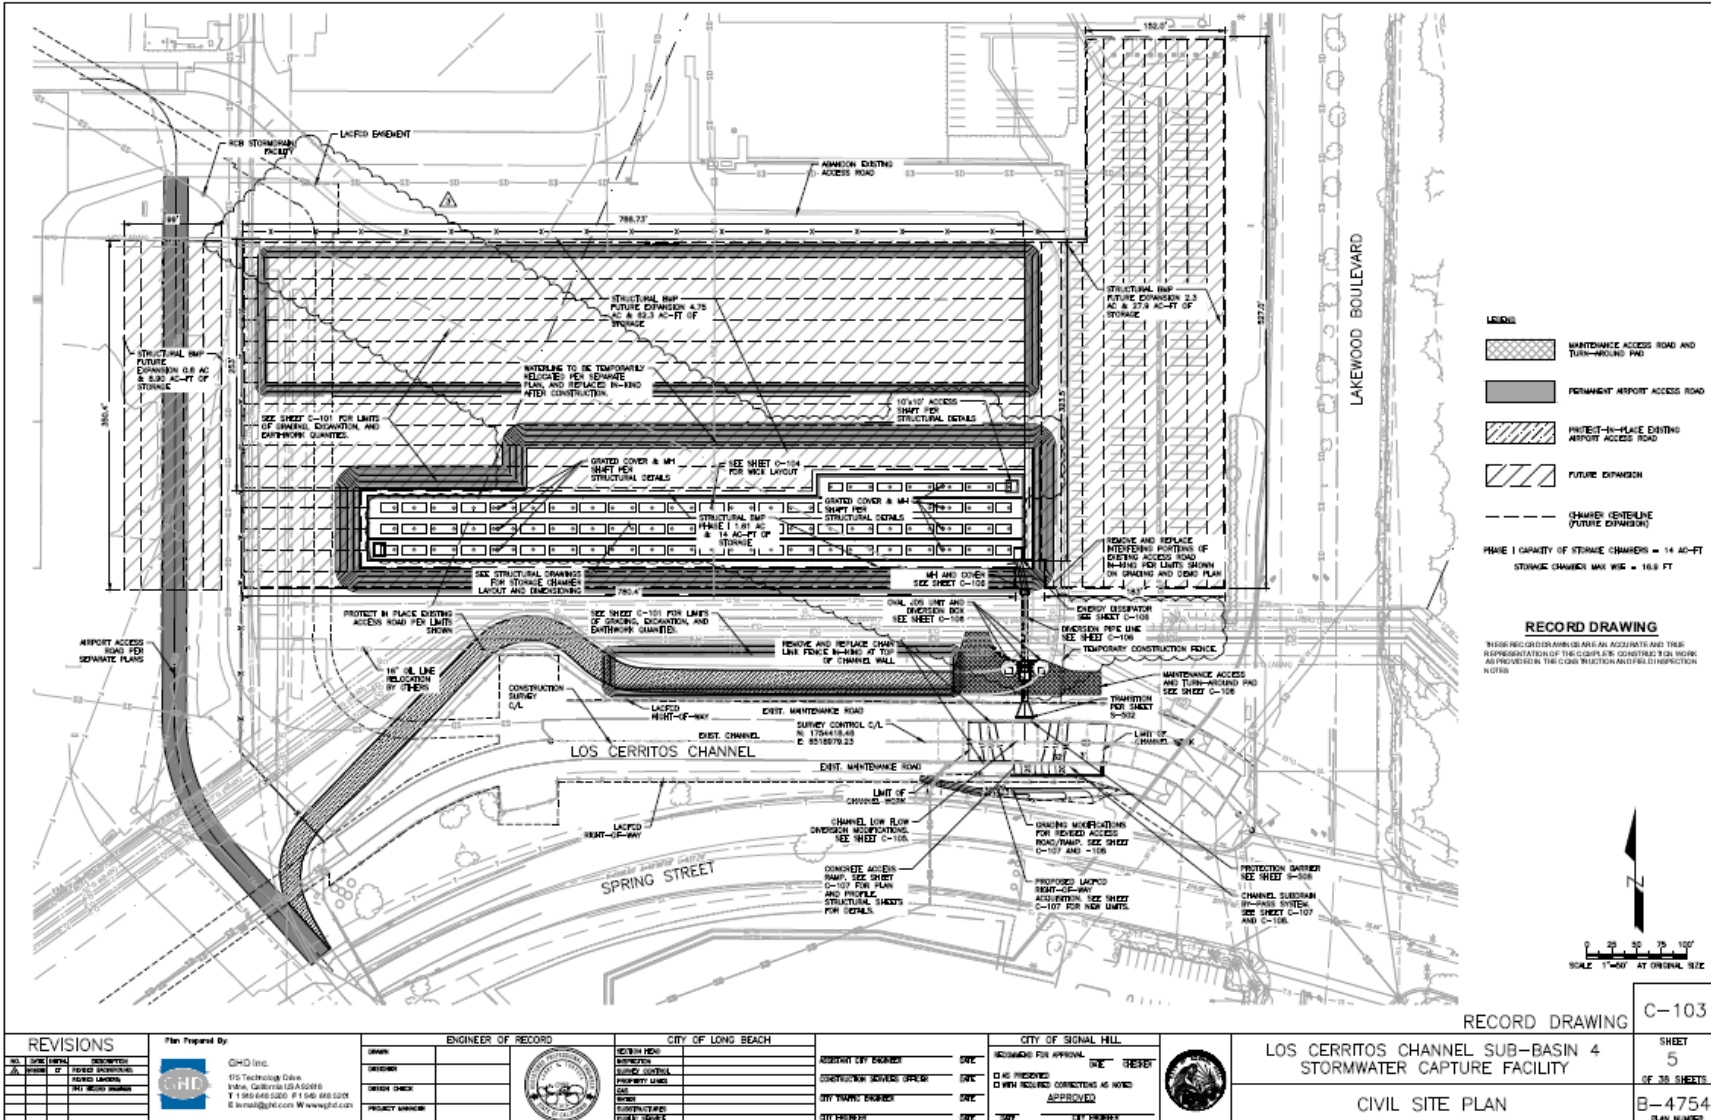

REVISIONS	
NO.	DESCRIPTION

Plan Prepared By:
 GHD Inc.
 915 Technology Drive
 Irvine, California, USA 92618
 T 1 949 444 5200 F 1 949 444 5201
 E irvine@ghd.com W www.ghd.com

ENGINEER OF RECORD	
DESIGN	
ENGINEER	
SEAL CHECK	
PROJECT MANAGER	

CITY OF LONG BEACH
 CITY OF LONG BEACH
 ASSISTANT CITY ENGINEER
 CITY ENGINEER


CITY OF SIGNAL HILL
 CITY OF SIGNAL HILL
 RECORDS FOR APPROVAL
 DATE RECEIVED
 DATE PREPARED
 DATE REVIEWED
 DATE APPROVED
 DATE CITY ENGINEER

LOS CERRITOS CHANNEL SUB-BASIN 4
 STORMWATER CAPTURE FACILITY
 CIVIL SITE PLAN

RECORD DRAWING C-103
 SHEET 5 OF 38 SHEETS
 B-4754 PLAN NUMBER


See full map here: [LCC Sub Basin 4 Map](#)

Urban Orchard

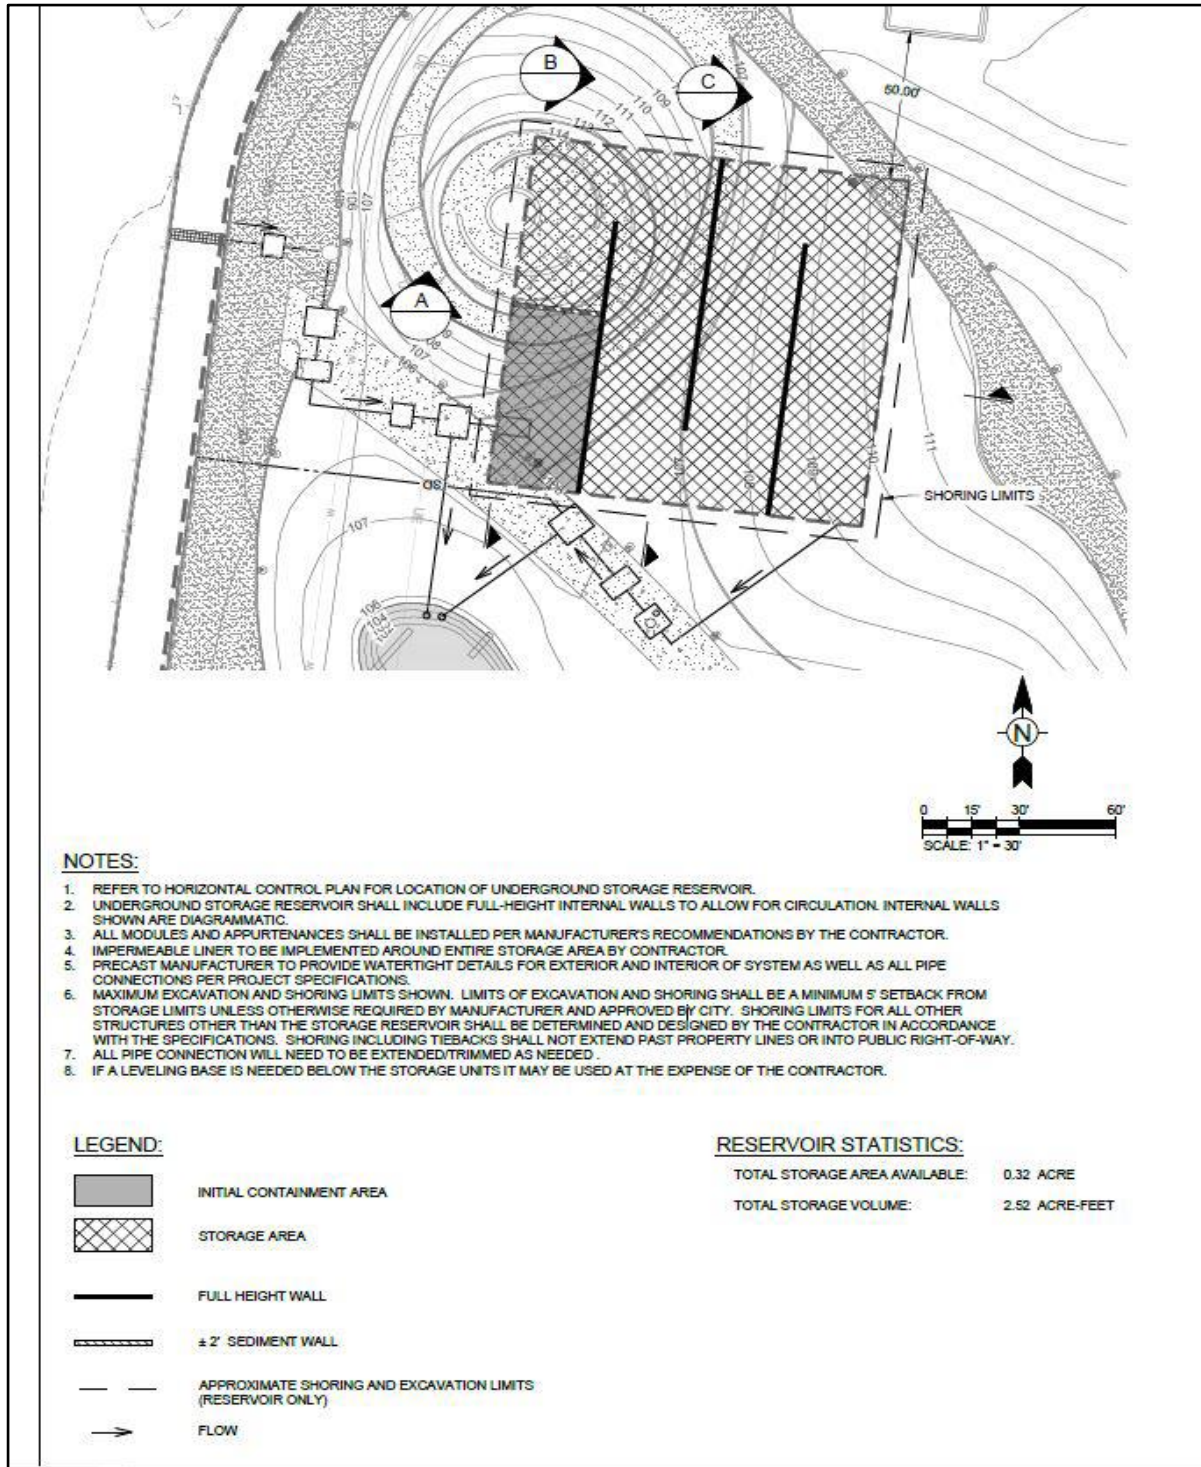

See full map here: [Urban Orchard Map](#)

Exhibit B - Photos of Existing O&M Efforts (Plastic Bags in Pumps, Sludge in Storage Vaults, etc.)

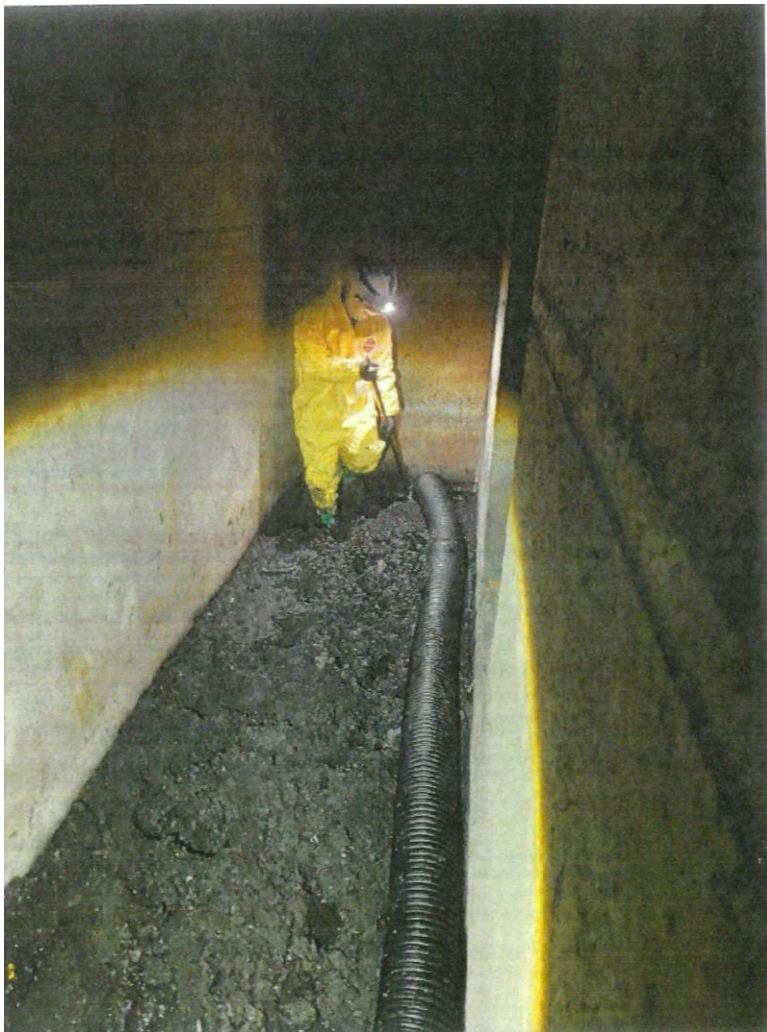

Workman removing solids from vault.



Plastic bags entwined in pump impeller.



Exhibit C - Links to O&M Manuals

Mayfair O&M Manual: [Mayfair O&M Manual](#)

Bolivar O&M Manual: [Bolivar O&M Manual](#)

Caruthers O&M Manual: [Caruthers O&M Manual](#)

Sub Basin 4 O&M Manual: [Long Beach Airport O&M Manual](#)

Urban Orchard O&M Manual: [Urban Orchard O&M Manual](#)



Exhibit D - BMP Engineering Recommendations

Bolivar Park: [Engineering Report](#)

Ruth R. Caruthers Park: Not available at this time

Mayfair Park: Not available at this time


Sub Basin 4: [Engineering Report](#)

Urban Orchard: This section is not applicable to Urban Orchard



Exhibit E- SCADA Images


Bolivar SCADA

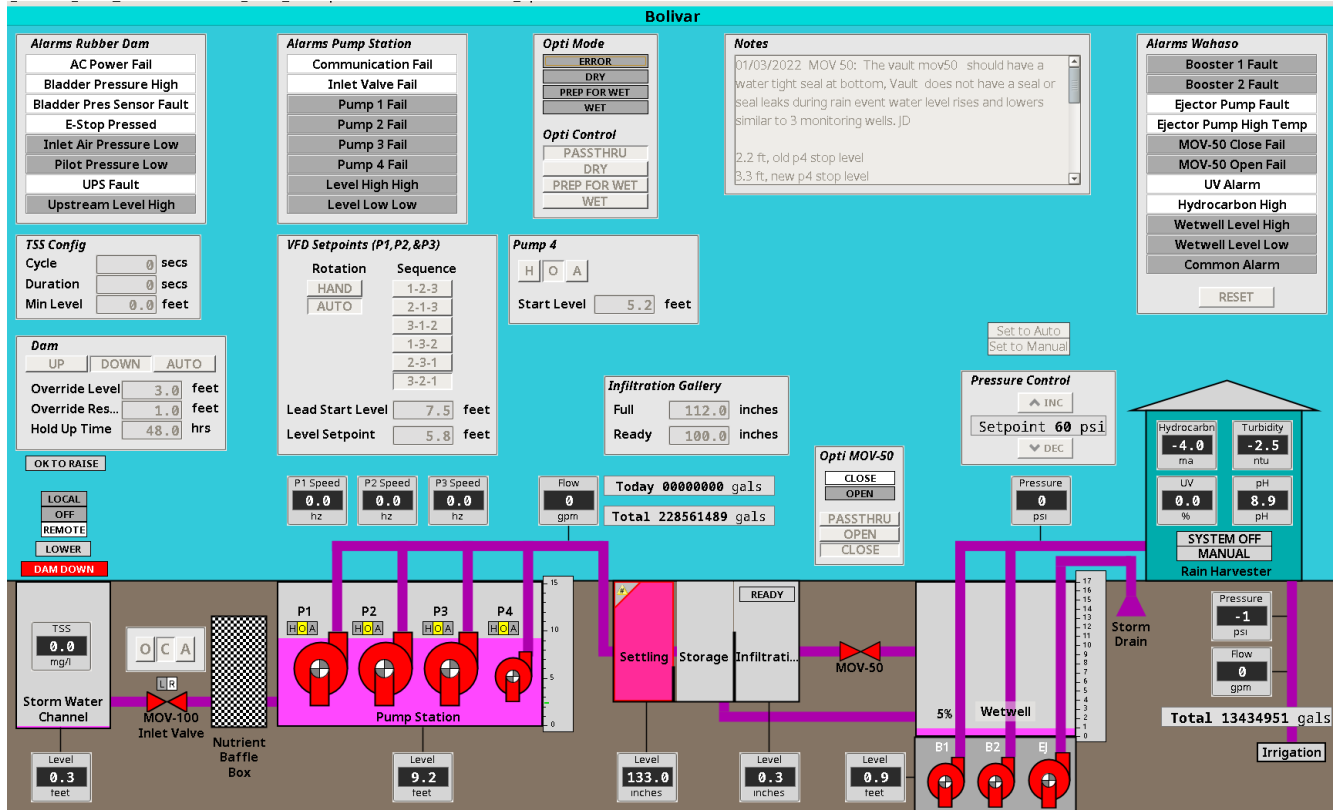

Bolivar SCADA




Mayfair SCADA

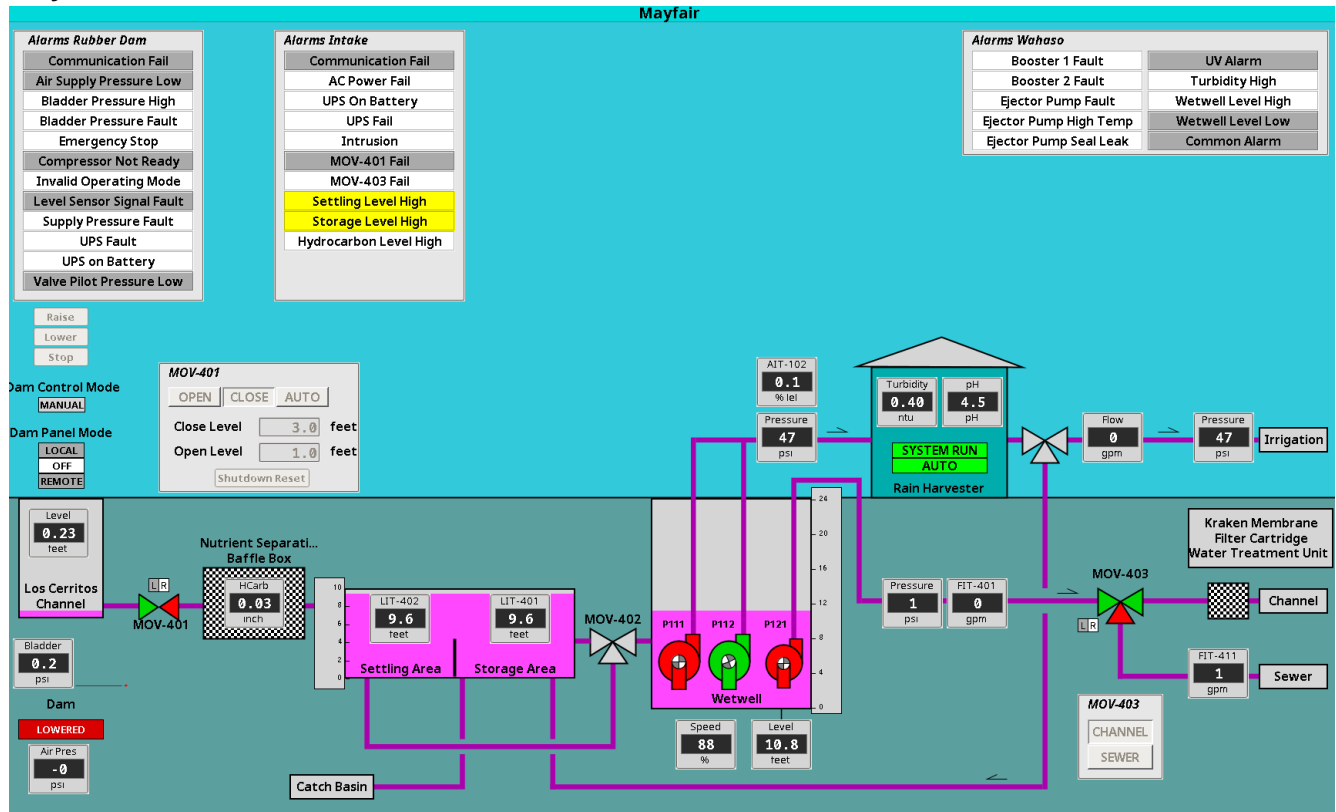

Mayfair SCADA



Caruthers SCADA

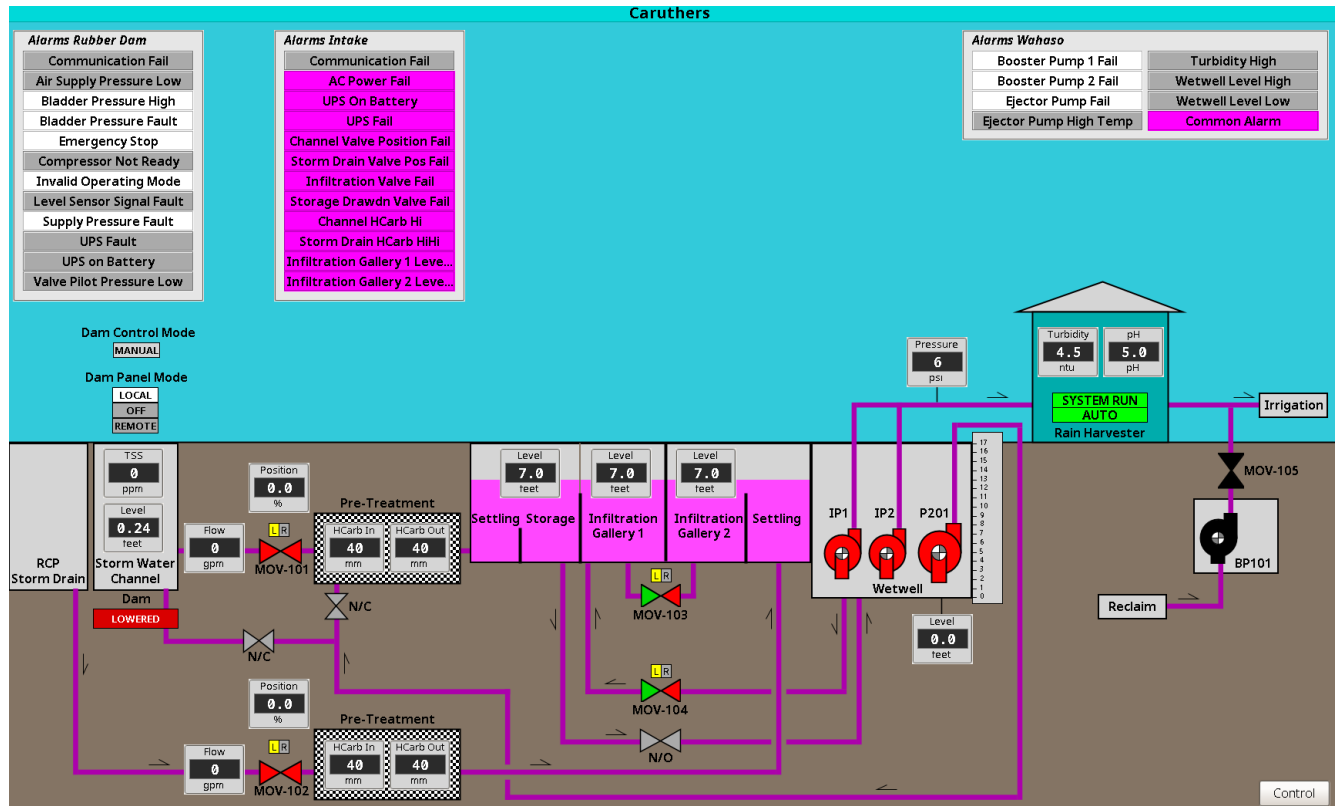

Caruthers SCADA

SCADA illustrations are not available for Sub Basin 4 and Urban Orchard.